

Docket No. 63512/JPW/SNS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

HON. COMMISSIONER OF PATENTS AND TRADEMARKS
Washington, D.C. 20231

November 2, 2000

S I R:

Transmitted herewith for filing are the specification and claims of the patent application of:

Nir Ben-Zvi for
Inventor(s)

FULL DUPLEX RE-TRANSMITTER
Title of Invention

Also enclosed are:

6 sheet(s) of informal X formal drawings.

X Oath or declaration of Applicant(s). (unsigned)

X A power of attorney (unsigned)

 An assignment of the invention to _____

A Preliminary Amendment

1 X A verified statement to establish small entity status under 37 C.F.R.
1.9 and 1.27. (unsigned)

The filing fee is calculated as follows:

CLAIMS AS FILED, LESS ANY CLAIMS CANCELLED BY AMENDMENT

	NUMBER FILED		NUMBER EXTRA*		RATE		FEE		
					SMALL ENTITY	OTHER ENTITY		SMALL ENTITY	OTHER ENTITY
Total Claims	13-20	=	0	X	\$9.00	\$18.00	=	\$0	\$
Independent Claims	3-3	=	0	X	\$40.00	\$30.00	=	\$0	\$
Multiple Dependent Claims Presented: Yes X No					\$135.00	\$270.00	=	\$355	\$710
*If the different in Col. 1 is less than zero, enter "0" in Col. 2					BASIC FEE			\$355	\$710
					TOTAL FEE			\$355	\$

☒ A check in the amount of \$ 355.00 to cover the filing fee.

☐ Please charge Deposit Account No. _____ in the amount of \$ _____.

☒ The Commissioner is hereby authorized to charge any additional fees which may be required in connection with the following or credit any over-payment to Account No. 03-3125:

☒ Filing fees under 37 C.F.R. §1.16.

☒ Patent application processing fees under 37 C.F.R. §1.17.


☐ The issue fee set in 37 C.F.R. §1.18 at or before mailing of the Notice of Allowance, pursuant to 37 C.F.R. §1.311(b).

☒ Three copies of this sheet are enclosed.

A certified copy of previously filed foreign application No. _____
_____ filed in _____ on _____.
Applicant(s) hereby claim priority based upon this aforementioned
foreign application under 35 U.S.C. §119.

☒ Other (identify) Express Mail Label bearing No. EL039583072US
Dated November 2, 2000, loose duplicate set of formal drawings

Respectfully submitted,



John P. White
Registration No. 28,678
Attorney for Applicants
Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036
(212) 278-0400

Applicant or Patentee: Nir Ben-Zvi Attorney's
Serial or Patent No.: Not Yet Known Docket No.: 63512
Filed or Issued: Filed November 2, 2000
Title of Invention or Patent: FULL DUPLEX RE-TRANSMITTER

VERIFIED STATEMENT (DECLARATION) CLAIMING
SMALL ENTITY STATUS UNDER 37 C.F.R. §1.9(f)
AND §1.27(c) - SMALL BUSINESS CONCERN

I hereby declare that I am:

 the owner of the small business concern identified below.

 X an official of the small business concern empowered to act on behalf of the
concern identified below:

Name of Concern: Ilissos Inc.

Address of Concern: 1209 Orange Street
Wilmington, Delaware 19801 U.S.A.

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 C.F.R. §121.3-18, reproduced in 37 C.F.R. §1.9(d), for purposes of paying reduced fees under 35 U.S.C. §41(a) and §41(b), in that the number of employees of the concern, including those of its affiliates, does not exceed five hundred (500) persons. For purposes of this verified statement, the number of employees of the business concern is the average number, over the previous fiscal year, of the persons employed by the business concern on a full-time, part-time, or temporary basis during each pay period of the fiscal year, and concerns are affiliates of each other when, either directly or indirectly, one concern controls or has power to control the other, or a third party or parties controls or has power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention entitled

FULL DUPLEX RE-TRANSMITTER
described in:

 X the specification filed herewith
 application serial no. filed
 patent no. issued

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below^a and no rights to the invention are held by any person, other than the inventor, who could not qualify as an independent inventor under 37 C.F.R. §1.9(c)*, any concern which could not qualify as a small business concern under 37 C.F.R. §1.9(d)* or as a nonprofit organization under 37 C.F.R. §1.9(e)*.

Name: N/A
Address:
 Individual Small Business Concern Nonprofit Organization

^aNOTE: Separate verified statements are required for each named person, concern, or organization having rights to the invention averring to their status as small entities. 37 C.F.R. §1.27.

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. 37 C.F.R. §1.28(b)*.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Name of Person Signing: _____

Title In Organization: _____

Address: _____

Signature: _____

Date Of Signature: _____

**Application
for
United States Letters Patent**

To all whom it may concern:

Be it known that Nir Ben-Zvi

have invented certain new and useful improvements in

FULL DUPLEX RE-TRANSMITTER

of which the following is a full, clear and exact description.

FULL DUPLEX RE-TRANSMITTER

Field of the Invention

The present invention relates to data transfer over networks that connect users by full-duplex connections. It also relates to QoS (Quality of Service), streaming and caching methods.

Background of the invention

The tremendous increase in the use of the Internet makes it necessary to decrease the response time of the Internet. The increased use of video and audio applications makes it even worse. Video and audio information volume is much bigger in terms of data storage than textual or even stills graphic information. Moreover, due to its nature, video and audio information should flow continuously, otherwise the information will not be understandable.

In order to overcome such problems, an effort is made by hosting services to bring the contents hosted by them as close as possible to the "last mile". This is usually done for specific contents (video, audio, HTML) and uses a costly infrastructure composed of hundreds of servers located mostly in the USA. Companies such as Akamai, Intervu, Sandpiper and Inkotomi follow this paradigm. The basic idea is to duplicate the information to all the servers and once a request arrives, locate the nearest server and direct the request to that server.

New terms were invented to deal with these issues, such as "streaming" (i.e. information that flows continuously) and QoS (Quality of Service). On the Internet and other networks, QoS assumes that transmission rate, error rates, and other characteristics can be measured, improved, and, to some extent, guaranteed in advance. QoS is of particular concern for the

continuous transmission of high-bandwidth video and multimedia information.

One of the prior art methods dealing with the problems is the "Proxy Server". A "proxy server" is a system that caches data items from other servers to speed up access. Its operation principle is that data reaching the proxy server is stored on the server's storage memory, and when further requests for this information arrives, the proxy fetches it from its own memory instead of downloading the data from the remote station where it resides permanently.

Internet Service Providers (ISPs) make use of proxy servers to speed-up the data flow of their services, and therefore to improve their service. Security and administrative control are co-products of the use of proxy servers.

An interesting phenomenon regarding the data flow through the Internet is the fact that most Internet interactions are asymmetric, since the user's requests for information are much smaller in data size terms than the resulting information received. For instance, a typical request for Internet page looks like "http://www.server.com"; however, this 22-byte request causes reception of an HTML page that usually contains visual information such as picture files or video files, and sometimes even vocal information. The size of a stills picture file is at least ten thousands bytes, and the size of video and audio files is hundreds of thousands of bytes. Therefore, a ratio of 1:10 between the upstream and the downstream data volume is not rare.

The asymmetry of traffic volume between downstream and upstream directions in networks such as the Internet has already been observed, and the prior art, e.g. US Patent No. 5,938,737, have attempted to exploit it for various purposes.

As regards proxies, the ultimate proxy server is one whose storage capacity is endless. Such a proxy server is impossible to create since the storage capacity is finite.

It is an object of the present invention to provide a method for utilizing network resources more efficiently by using the receiver's local network connections and upstream bandwidth for data streaming.

It is a further object of the invention to provide a method that increases the amount of the cache capacity without requiring the use of a traditional proxy server, nor the addition of physical mass-storage apparatus to servers in the network.

It is yet a further object of the invention to provide a scalable method the cache capacity of which increases as the number of users connected to a network increases.

It is another object of the invention to provide a method that makes use of the upstream bandwidth in order to achieve better performance of data flow in networks.

It is still another object of the invention to provide a method for improving the QoS in full-duplex connections on applications such as Internet, satellites, DSL, etc., which overcomes the drawbacks of the prior art.

It is yet another object of the invention to provide a method for improving the QoS, which is not bound to a specific protocol or data type.

It is a further object of the invention to provide a method, which improves the QoS on Web multi-cast transmissions.

It is another object of the invention to provide a method for decreasing the network load.

Other objects and advantages of the invention will become apparent as the description proceeds.

Summary of the Invention

In one aspect, the invention is directed to a method for efficiently exploiting an upstream channel bandwidth of full-duplex connection between a user and network, comprising:

- a) receiving data from said network by at least one user;
- b) storing said data on said user's storage device for a predetermined period of time for further use; and
- c) re-transmitting said received data to other users.

According to a preferred embodiment of the invention the re-transmission of said received data to said users is carried out during download time. According to another preferred embodiment of the invention the re-transmission of said received data to said users is carried out after downloading is completed.

The invention is further directed to a method comprising:

- a) receiving said data by said user;
- b) storing said received data on said user's computer system; and
- c) re-transmitting said data from the user's location to said users through said upstream channel bandwidth in response to a request or according to pre-defined operation instructions.

According to a preferred embodiment of the invention the method comprises:

- a) receiving data on said user's computer system;

- b) causing said received data to be re-transmitted through said upstream channel bandwidth from said user to a first group of one or more other users;
- c) causing said received data to be re-transmitted through said upstream channel bandwidth from said first group of users to a further group of one or more other users; and
- d) repeating step (c) for all said users requesting the same said data.

Optionally, said data is transmitted to said user from a plurality of other users. Furthermore, the transmission of data from one user to one or more other user(s) can be carried out with delay.

In another preferred embodiment of the invention the method comprises:

- a) receiving data on said user's computer system;
- b) re-transmitting said received data through said upstream channel bandwidth to a dedicated server for storage; and
- c) retrieving said stored data from said dedicated server for other purposes.

In another aspect, the invention is directed to a system for managing data flow in a data network, comprising:

- a) a coordination center for tracking data entities distributed over said data network;
- b) a plurality of users having computer means connected to said data network via a full-duplex connection, said computer means comprising or being coupled to memory means; and
- c) software and/or hardware means for re-transmitting data from the computer of each user via the upstream channel of his full duplex connection to other users connected to said network.

The coordination center may comprise storage means and software/hardware components for storing information related to the data

passed through the network, and for data retrieval. Furthermore, the users can be provided with software/hardware components, suitable to re-transmit the data received in said user's computer to the other users on the network according to instructions from the coordination center or according to pre-defined operation instructions.

According to a preferred embodiment of the invention the users are provided with software/hardware components suitable to send information to the coordination center representative of the upstream bandwidth available, and of the contents stored in the memory means associated with the user's computer, that are available for retransmission.

Brief Description of Drawings

All the above and other characteristics and advantages of the invention will be better understood through the following illustrative and non-limitative description of preferred embodiments thereof, with reference to the appended drawings, wherein:

Fig. 1 schematically illustrates a typical layout of a prior art network, such as the Internet;

Fig. 2 schematically illustrates the downstream and upstream data flow in a prior art network;

Fig. 3 schematically illustrates the data flow when using a prior art proxy server compared to the data flow when using a "Proxy Coordinator", according to a preferred embodiment of the invention;

Fig. 4 illustrates the data flow in a serial data flow scheme, according to a preferred embodiment of the invention;

Fig. 5 illustrates the data flow in a tree data flow scheme, according to other preferred embodiment of the invention.

Fig. 6 illustrates a recording server, according to a preferred embodiment of the invention.

Detailed Description of Preferred Embodiments

Fig. 1 schematically illustrates a typical layout of a prior art network, such as the Internet. Users 111 to 115, 121 to 124 etc. are connected to Internet Service Providers 110, 120, 130, 140, 150 and 160, which are connected to network 100. While Internet Service Provider (ISP) 110, which is located in the USA, is using proxy server 101, Internet Service Provider (ISP) 140 which is located in China, is not using a proxy server. Proxy server 101 stores temporary files that arrive at the server. The next time that server 110 receives a request to download a file that is already stored on the server, instead of downloading it from the location where it permanently resides, the proxy server will send the file in it.

Before sending the file to the user, the proxy server should verify that the permanent file was not updated since the last upload to the server. In terms of data volume, in comparison to the entire-file download, this operation is negligible. Therefore, from the user's point of view, there is an improvement of the quality of service, since the waiting time to download is shorter.

Fig. 2 schematically illustrates the downstream and upstream data flow in a prior art network. The downstream direction is from network 200 to ISP (Internet Service Provider) 210, and from ISP 210 to users 201 to 204. Due to the nature of the Internet, there is a meaningful gap between the volume of data that flows in the downstream direction and the volume of data that flows in the upstream direction. The upstream flow is marked by dashed lines, and the downstream flow is marked by continuous lines.

Fig. 3 schematically illustrates data flow occurring when using a proxy server and data flow occurring when using a system according to a preferred embodiment of the invention, that will be termed hereinafter "Proxy Coordinator", for the sake of brevity. While Internet Service Provider (ISP) 310 is using proxy server 311, Internet Service Provider (ISP) 320 is using a "Proxy Coordinator", according to an embodiment of the invention. Schematically the two systems may appear similar, however there is a meaningful difference between them. While proxy server (PS) 311 stores the whole-received information for future requests, Proxy Coordinator (PC) 321 stores only the pointers to the permanent file and to the last one or more users that received this information. This difference is very significant, since the amount of information proxy coordinator (PC) 321 has to store is much smaller than the amount of information proxy server (PS) 311 has to store. In order to communicate with the Proxy Coordinator, the user's computer system should be modified, i.e. to contain a software component, such as enhancement or add-in to the browser. The software component is indicated at 325, 326, and 327 in Fig. 3.

A "pointer" may be, for instance, a URL (Uniform Resource Locator), which is the address of a file (resource) accessible on the Internet.

On the next request for information, the proxy coordinator (PC) verifies that the information is still stored on the user's computer, and if so, the user sends this file (or information) via the upstream channel, which is usually not busy. The delay caused by the verification is not meaningful. It is also possible to ignore the verification stage, and to use other criteria instead, such as the time elapsed since the last download.

This scheme may be implemented in different variations. For instance, the proxy coordinator (PC) can store not only the last destination to which the

information was sent, but also all the destinations that received this information in the last hour, or after pre-set period of time.

A typical scenario regarding this scheme is:

1. User 322 initiates a request for an HTML page. The request is sent through its upstream channel.
2. The received HTML file enters into the gateway of ISP (Internet service provider) 320, and is registered at the PC (Proxy Coordinator) 321 storage device.
3. The file is forwarded to user 322.
4. User 324 initiates a request for the same HTML file via PC 321.
5. PC 321 scans its table to find out if this file is registered in its storage.
6. PC 321 sends an order to user 322 to send the HTML file to user 324.
7. User 322 verifies that the file still exists in its cache memory, and if it does exist, user 322 sends the file via its upstream channel to user 324, via PC 321 or directly, depending on the connection between the users.

As will be apparent to the skilled person, the benefits achieved by proxy coordination architecture are: bigger cache capacity in comparison to proxy servers (as the number of users increases, the volume of cache storage increases), local data flow activity rather than global data flow activity and therefore better QoS, and faster transfer (as the number of receivers increases, the number of potential transmitters increases).

Another embodiment of the invention is particularly useful in the field of streaming. Improving the QoS on streaming issues can be achieved by sharing the transmission effort with the users, where users are using their upstream channel to send data to other users.

In the case where there are 63 pre-determined users that are listening to an 8-kbit audio Web-cast: The server that initiates the Web-cast can either send the signal to all 63 users, which means that it has to send 504 kbit, or it can make use of the users as re-transmitters, according to the present invention. In this way, instead of 504 kbit, the Web-cast server would send one stream of 8kbit to the first user, which would then send it to the next user and so on. The slight delay in receipt from one user to the other is usually meaningless for common users such as video or music.

Fig. 4 illustrates the data flow in a serial flow scheme, according to a preferred embodiment of the invention. According to this scheme, only user 401 receives the transmission from the transmitter 400. User 402 receives the transmission from user 401, and so on. The drawback of this method is that the last user, 463, receives the transmission stream only after it has been through all the other users. Of course, a Proxy Coordinator (not shown) must be used to coordinate transmission from one user to the other.

Although this delay is measured in seconds or even 10^{ths} of a second, it is possible to diminish this delay by employing a different type of architecture. For example, since the audio transmission is 8kbit and the typical modem nowadays has a capability of at least 24kbit, it is possible to assign each receiver to transmit to two others. This constitutes a tree structure whereby, instead of waiting for 62 transmissions, the last user gets the signal after 5 tree levels, i.e. 5 transmissions. Fig. 5 illustrates the tree data flow architecture, according to a preferred embodiment of the invention. The streaming server 500 sends the signal, which may be audio transmission, only to the first user 501. User 501 sends the transmission to users 502 and 503. User 502 sends the transmission to user 504 and 505, and so on.

In order to achieve better QoS in video and music broadcasts, such applications may perform the following operations:

- a) To ensure that each user receives transmission from two transmitters or more. When one data source fails, the other source is still transmitting. From the receiver's point of view it means better QoS. The multiple transmission may increase the incoming traffic but can be adjusted so that it will increase the overall quality of the received transmission.
- b) Regarding video and music applications: a delay of a few seconds doesn't influence the QoS. In such applications, only the streaming feature is meaningful. Therefore, such applications can improve their QoS by using a time buffer of a few seconds. The presence of such a buffer means that each transmitter stores a few seconds of broadcast, and when the source fails, the transmission is not interrupted during the period of the time stored in the buffer. If the failed source recovers during the stored period of time, the streaming will not be affected.

Combination of the two methods can achieve even better results.

According to another preferred embodiment of the invention, a different use of the upstream bandwidth can be implemented when sent data should be recorded for further use, such as evidence. An example of this preferred embodiment is an insurance application, where the data received by the clients should be recorded in order to prove that an individual user has been exposed to this information. According to the invention, such an implementation can be performed by sending the received information to a so-called "recording server", which records the information received by the client. The information is sent from the client's position to the recording server via the upstream channels.

Fig. 6 illustrates a recording server, according to this embodiment of the invention. Users 603 are connected to network 601 through a full duplex modem connection. A recording server 600 can also be present, as are, for instance, a US Web server 606 and Chinese Streaming Server 607. Each user re-transmits the data to the recording server 600 through the mostly free upstream channel.

The above examples and description have of course been provided only for the purpose of illustration, and are not intended to limit the invention in anyway. As will be appreciated by the skilled person, the invention can be carried out in a great variety of ways, employing more than one technique from those described above, all without exceeding the scope of the invention.

CLAIMS

1. A method for efficiently exploiting an upstream channel bandwidth of full-duplex connection between a user and network comprising:
 - a) receiving data from said network by at least one user;
 - b) storing said data on said user's storage device for a predetermined period of time for further use; and
 - c) re-transmitting said received data to other users.
2. A method according to claim 1, wherein the re-transmission of said received data to said users is carried out during download time.
3. A method according to claim 1, wherein the re-transmission of said received data to said users is carried out after downloading is completed.
4. A method according to claim 1, comprising:
 - a) receiving said data by said user;
 - b) storing said received data on said user's computer system; and
 - c) re-transmitting said data from the user's location to said users through said upstream channel bandwidth in response to a request or according to pre-defined operation instructions.
5. A method according to claim 1, comprising:
 - a) receiving data on said user's computer system;
 - b) causing said received data to be re-transmitted through said upstream channel bandwidth from said user to a first group of one or more other users;
 - c) causing said received data to be re-transmitted through said upstream channel bandwidth from said first group of users to a further group of one or more other users; and
 - d) repeating step (c) for all said users requesting the same said data.

6. A method according to claim 5, wherein said data is transmitted to said user from a plurality of other users.
7. A method according to claim 5, wherein the transmission of data from a user to one or more other user(s) is carried out with delay.
8. A method according to claim 1, comprising:
 - a) receiving data on said user's computer system;
 - b) re-transmitting said received data through said upstream channel bandwidth to a dedicated server for storage; and
 - c) retrieving said stored data from said dedicated server for other purposes.
9. A system for managing data flow in a data network, comprising:
 - a) a coordination center for tracking data entities distributed over said data network;
 - b) a plurality of users having computer means connected to said data network via a full-duplex connection, said computer means comprising or being coupled to memory means; and
 - c) software and/or hardware means for re-transmitting data from the computer of each user via the upstream channel of his full duplex connection to other users connected to said network.
10. A system according to claim 9, wherein the coordination center comprises storage means and software/hardware component for storing information related to the data passed through the network and for data retrieval.
11. A system according to claim 9, wherein the users are provided with software/hardware components, suitable to re-transmit the data received in said user's computer to the other users on the network

according to instructions from the coordination center or according to pre-defined operation instructions.

12. A system according to claim 9, wherein the users are provided with software/hardware components suitable to send information to the coordination center representative of the upstream bandwidth available, and of the contents stored in the memory means associated with the user's computer, that are available for retransmission.
13. A method for efficiently exploiting an upstream channel bandwidth of full-duplex connection between a user and network, essentially as described and illustrated.

Abstract

Method for efficiently exploiting an upstream channel bandwidth of full-duplex connection between a user and network. Data from the network is received by a user. The data is stored on the user's storage device, for a predetermined period of time for further use. The received data is then re-transmitted to other users, during download time or after downloading is completed. The data from the user's location may be re-transmitted to the users through the upstream channel bandwidth, in response to a request, or according to pre-defined operation instructions.

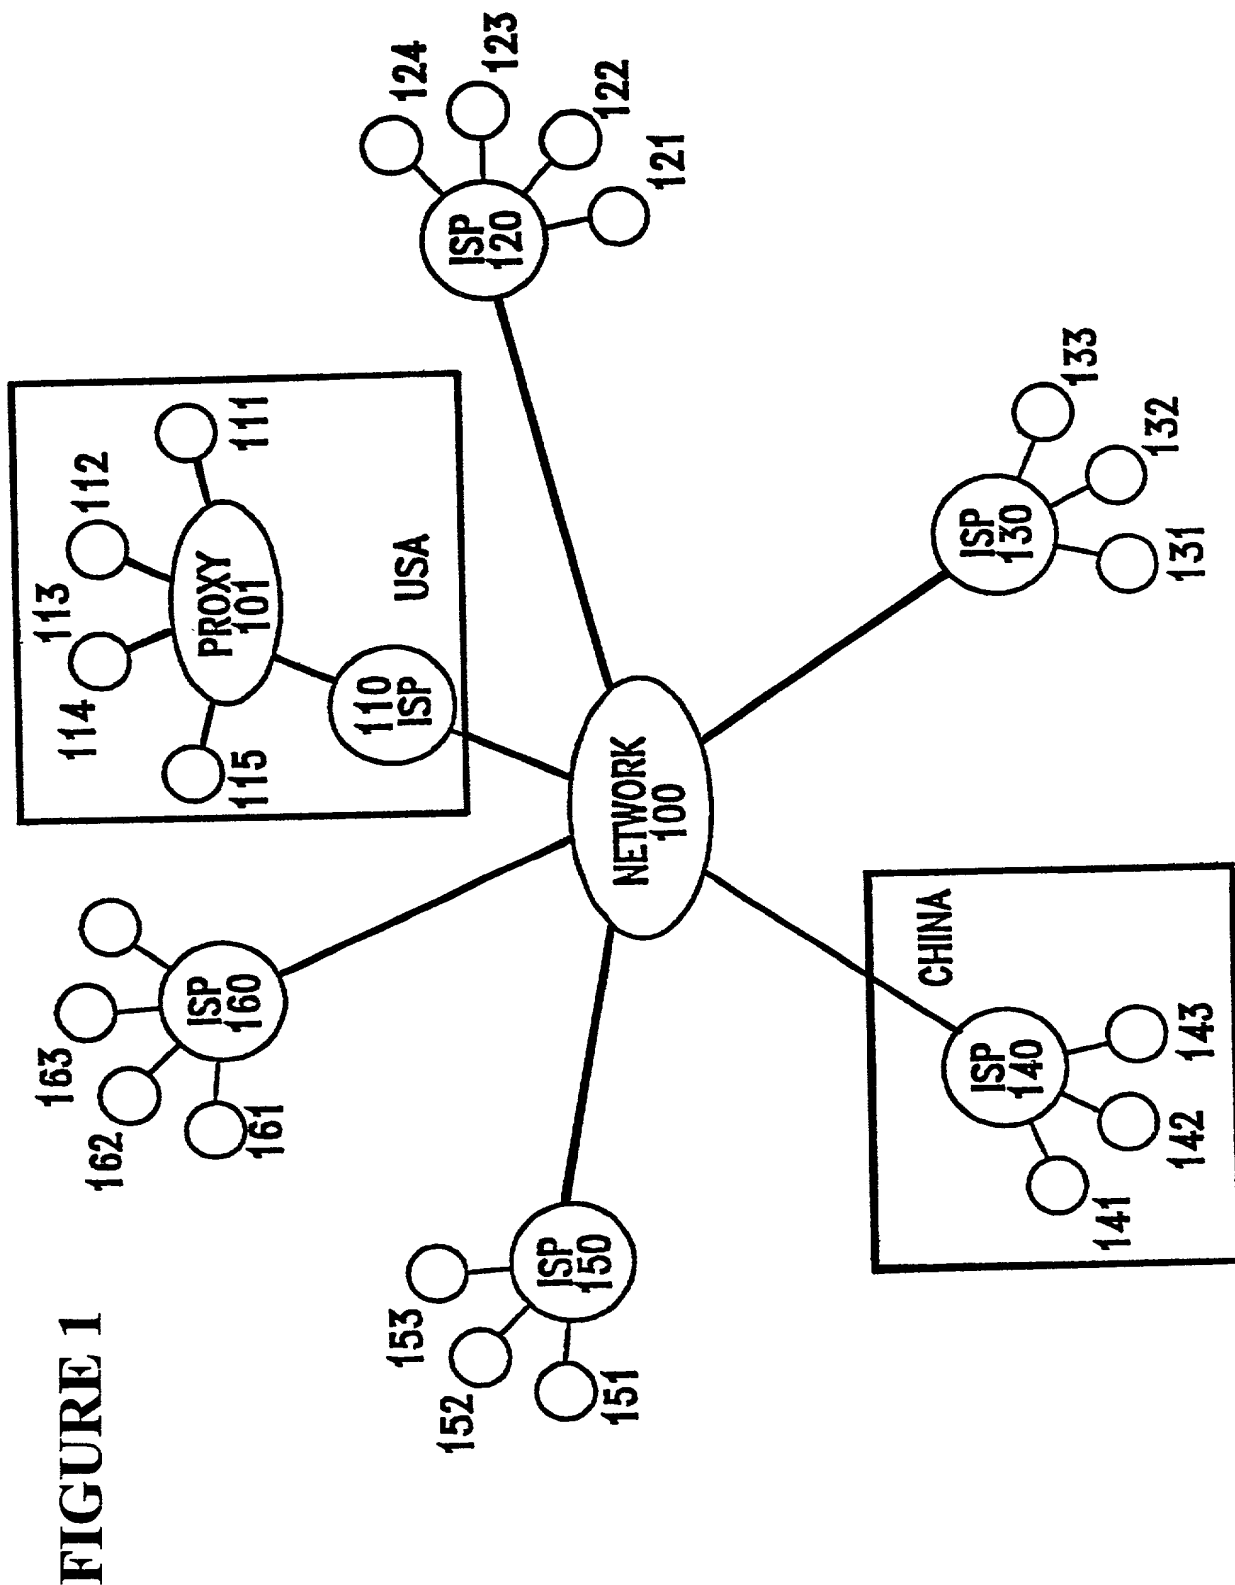


FIGURE 2

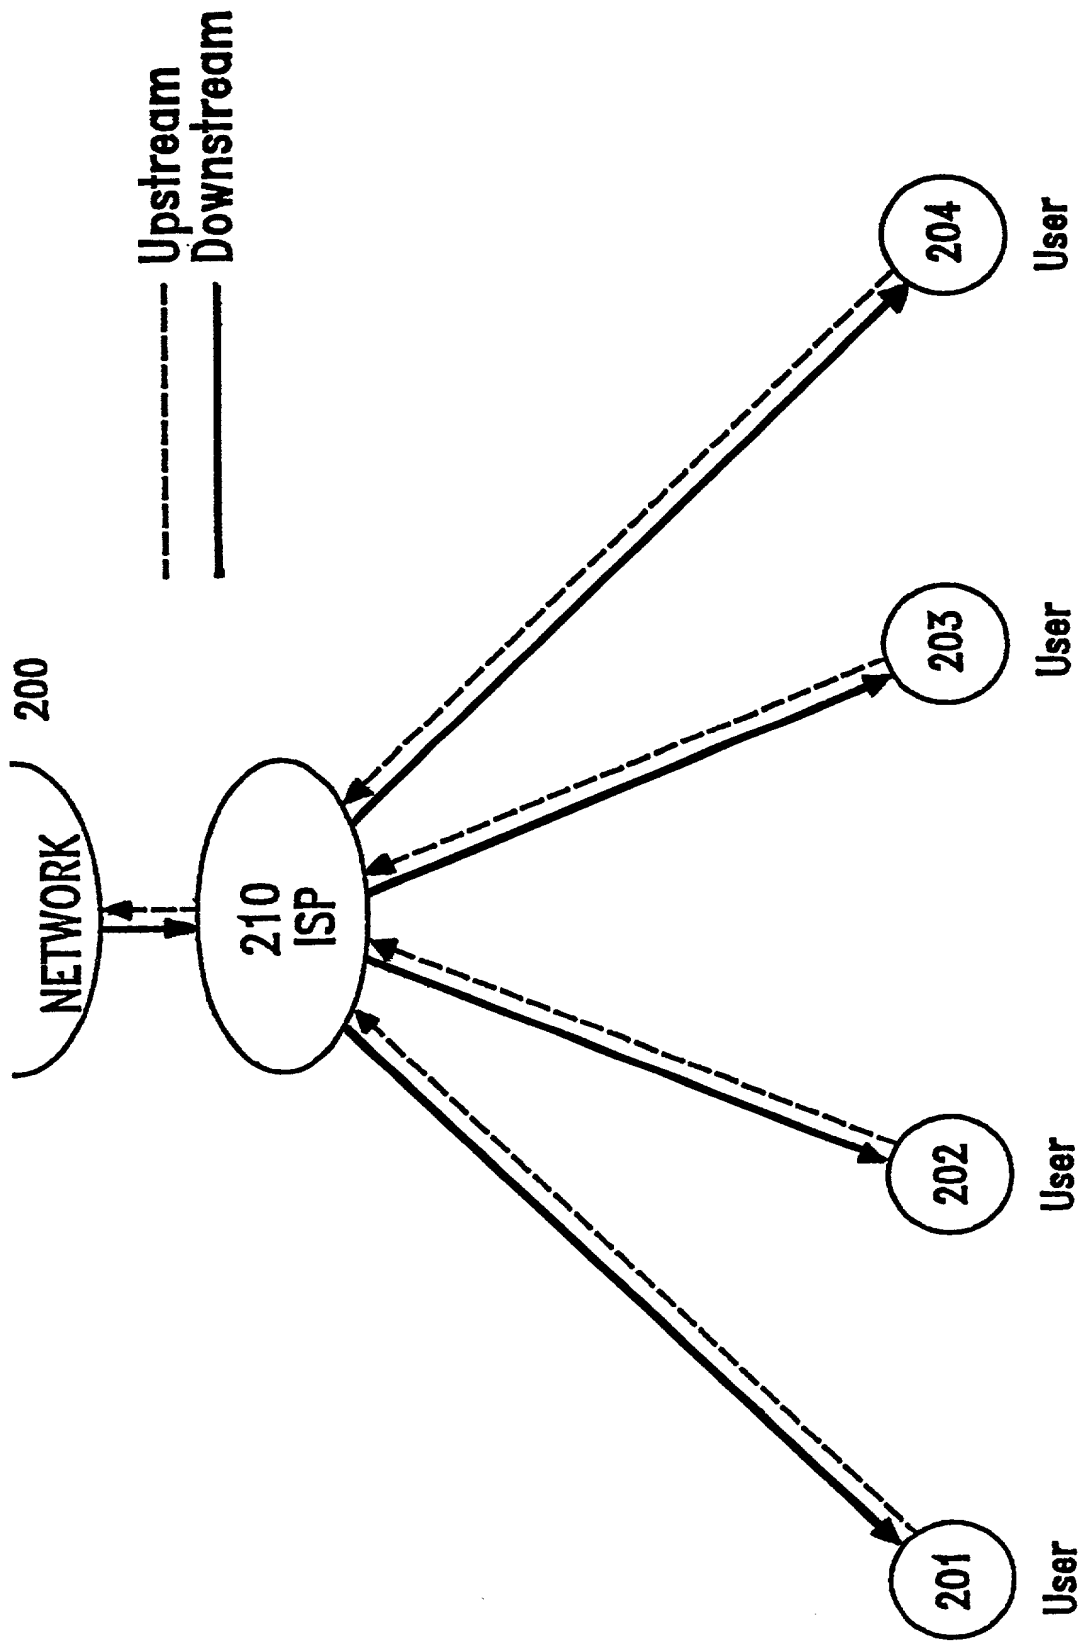


FIGURE 3

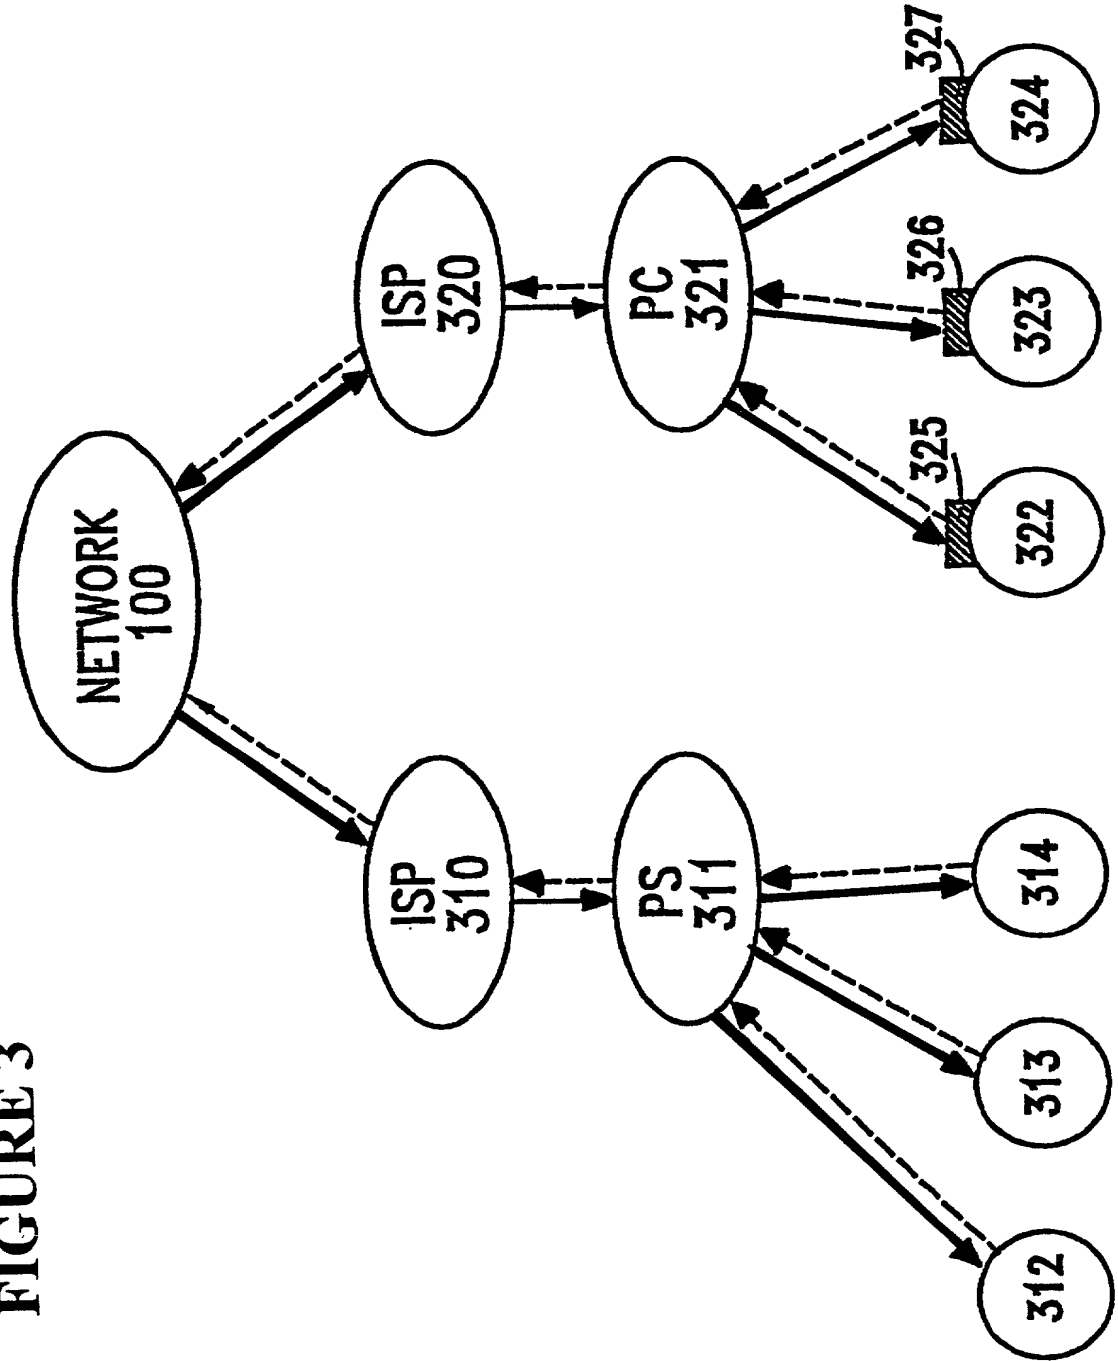


FIGURE 4

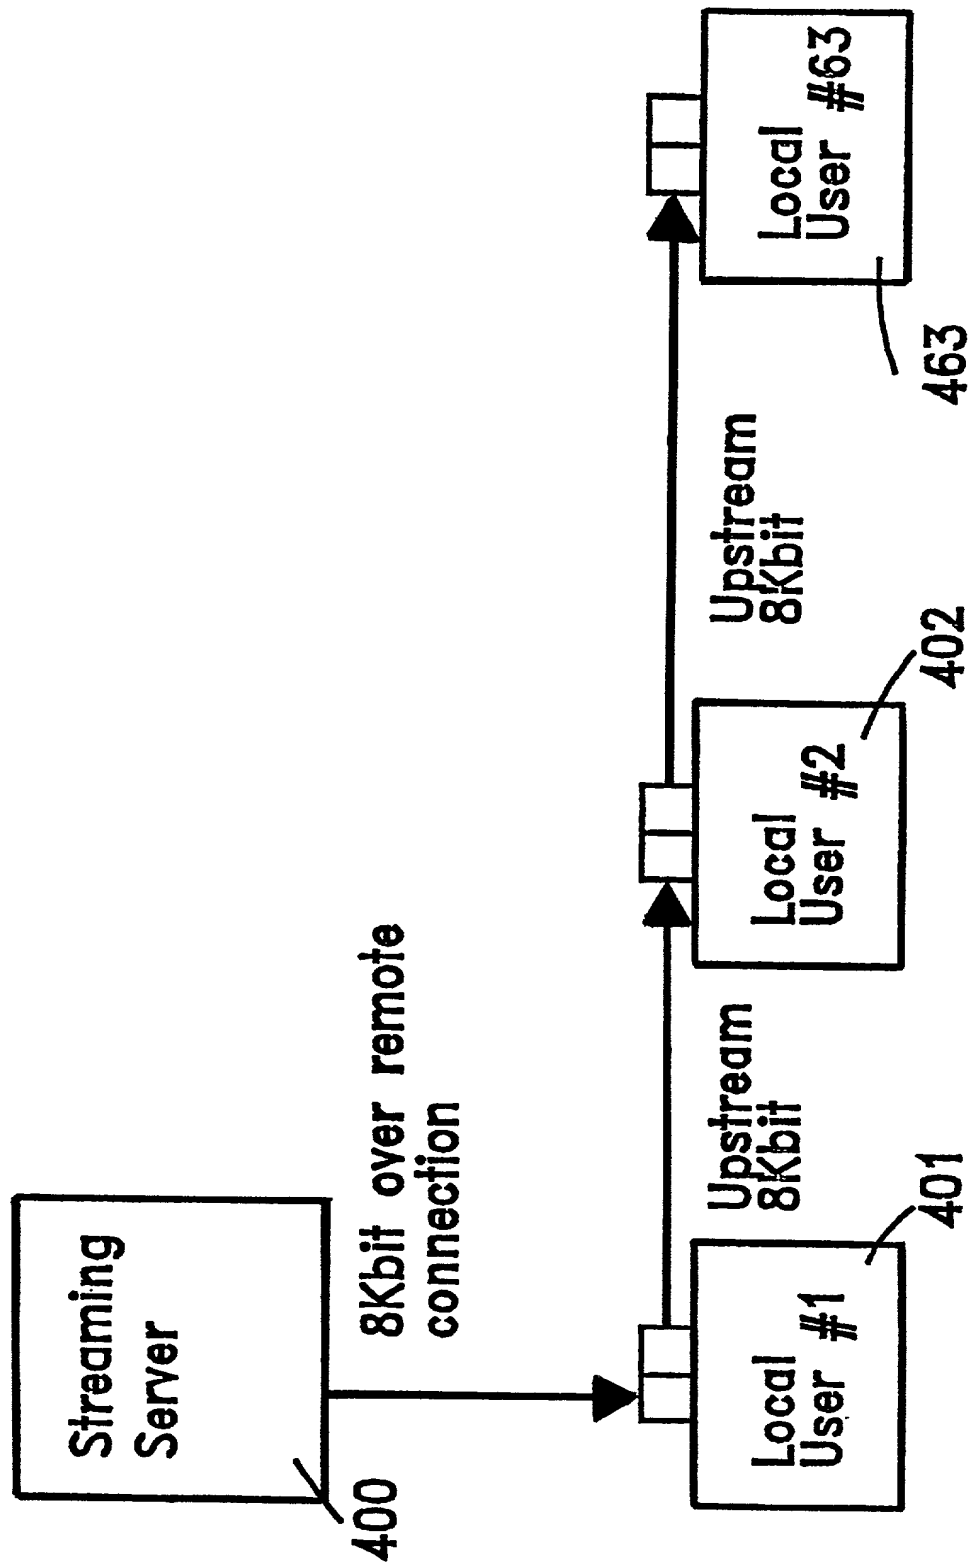


FIGURE 5


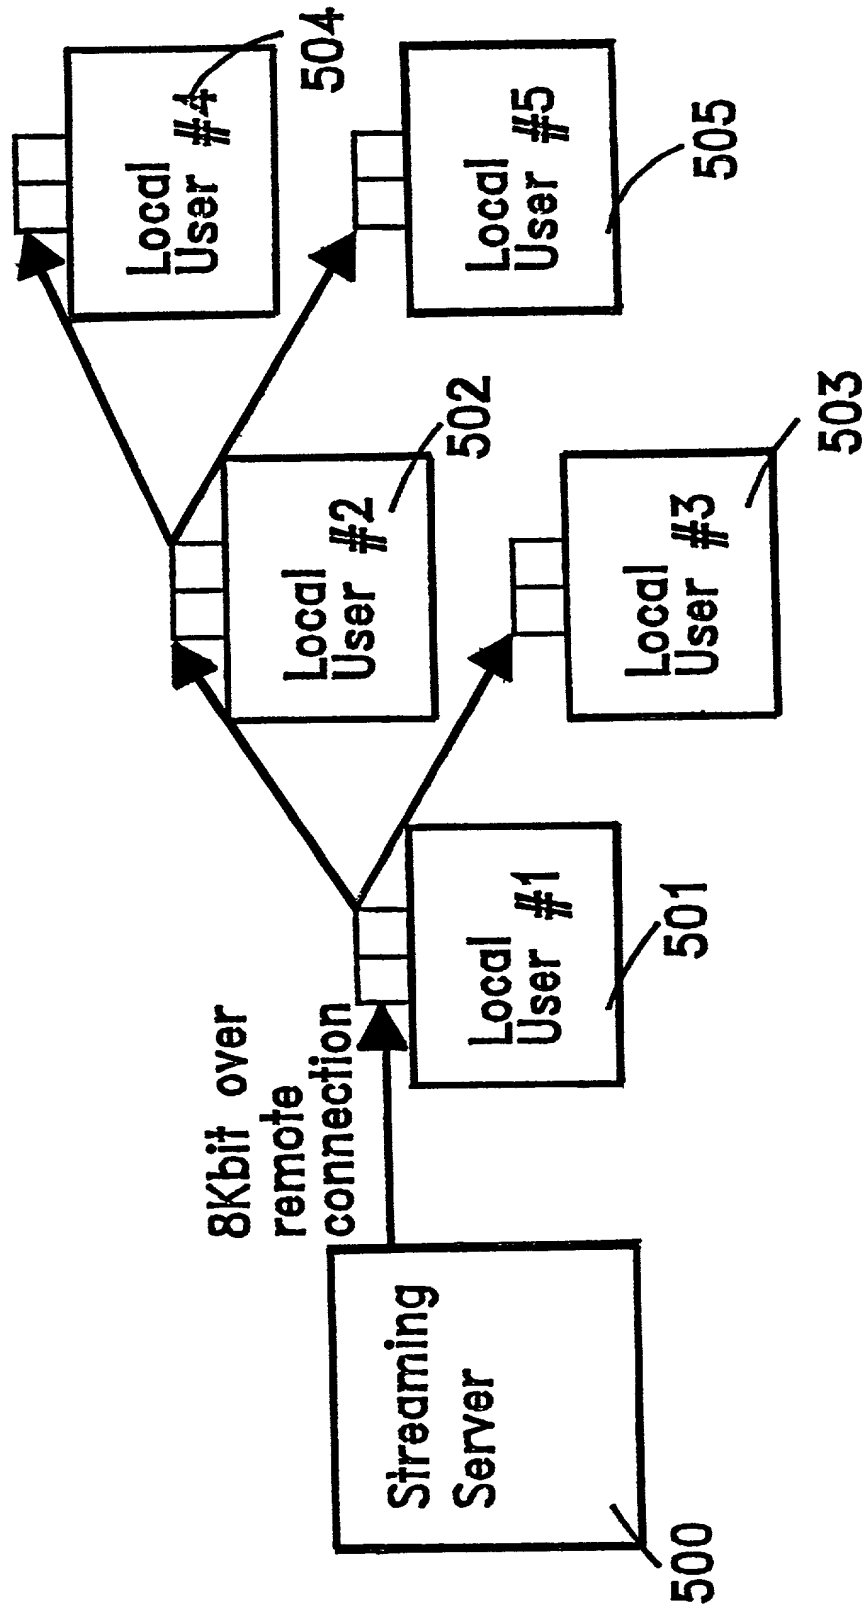


FIGURE 6

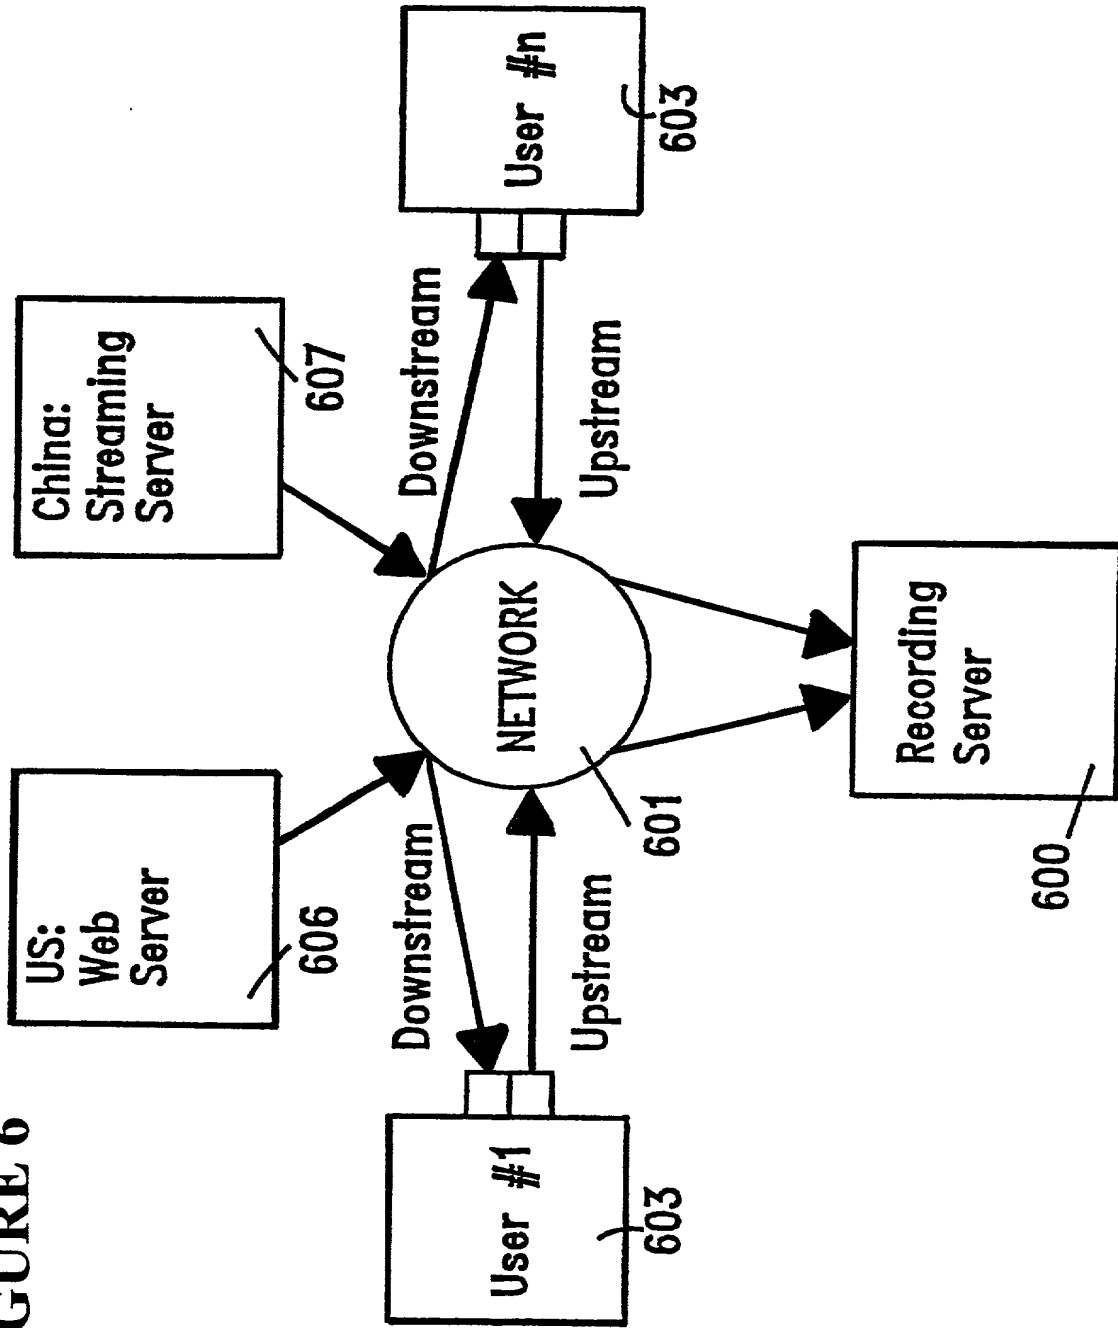

As a below-named inventor, I hereby declare that:

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

the specification of which:
(check one)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 (a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International Application which designated at least one country other than the United States, listed below. I have also identified below any foreign application for patent or inventor's certificate, or PCT International Application having a filing date before that of the earliest application from which priority is claimed:

Priority Claimed

<u>Number</u>	<u>Country</u>	<u>Filing Date</u>	<u>Yes</u>	<u>No</u>
133039	Israel	November 18, 1999	X	

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

<u>Provisional Application No.</u>	<u>Filing Date</u>	<u>Status</u>
N/A		

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States Application(s), or Section 365(c) of any PCT International Application(s) designating the United States listed below. Insofar as this application discloses and claims subject matter in addition to that disclosed in any such prior Application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56, which became available between the filing date(s) of such prior Application(s) and the national or PCT international filing date of this application:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
N/A		

And I hereby appoint

John P. White (Reg. No. 28,678); Christopher C. Dunham (Reg. No. 22,031); Norman H. Zivin (Reg. No. 25,385); Jay H. Maioli (Reg. No. 27,213); William E. Pelton (Reg. No. 25,702); Robert D. Katz (Reg. No. 30,141); Peter J. Phillips (Reg. No. 29,691); Wendy E. Miller (Reg. No. 35,615); Richard S. Milner (Reg. No. 33,970); Albert Wai-Kit Chan (Reg. No. 36,479); Robert T. Maldonado (Reg. No. 38,232); Mary Anne P. Tanner (Reg. No. 40,197); Paul Teng (40,837); Gerard M. Wissing (Reg. No. 36,309); George M. MacDonald (Reg. No. 39,284); Richard F. Jaworski (Reg. No. 33,515); Elizabeth M. Wieckowski (Reg. No. P-42,226); Victor Devito (Reg. No. 36,325); Pedro C. Fernandez (Reg. No. P-41,741); William D. DeVaul (Reg. No. P-42,483); Todd A. Holmbo (Reg. No. P-42,665); and Steven J. Lieb (Reg. No. P-41,943)

and each of them, all c/o Cooper & Dunham LLP, 1185 Avenue of the Americas, New York, New York 10036, my attorneys, each with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent, to transact all business in the Patent and Trademark Office connected therewith and to file any International Applications which are based thereon under the provisions of the Patent Cooperation Treaty.

Please address all communications, and direct all telephone calls, regarding this application to:

John P. White

Reg. No. 28,678

Cooper & Dunham LLP

1185 Avenue of the Americas

New York, New York 10036

Tel. (212) 278-0400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or

first joint inventor Nir Ben-Zvi

Inventor's signature _____

Citizenship Israel

Date of signature _____

Residence 33 Hagilad Street, Arad 89034, Israel

Post Office Address same as above

Full name of joint
inventor (if any) _____

Inventor's signature _____

Citizenship _____

Date of signature _____

Residence _____

Post Office Address _____

Full name of joint
inventor (if any) _____

Inventor's signature _____

Citizenship _____

Date of signature _____

Residence _____

Post Office Address _____